

Diesel generator set QSK78 series engine

2750kVA - 3000kVA 50 Hz



Description

This Cummins[®] commercial generator set is a fully integrated power generation system, providing optimum performance, reliability, and versatility for stationary standby, prime power, and continuous duty applications.

Features

Cummins[®] heavy-duty engine - Rugged 4-cycle industrial diesel delivers reliable power, low emissions and fast response to load changes.

Permanent Magnet Generator (PMG) - Offers enhanced motor starting and fault clearing short circuit capability.

Alternator - Several alternator sizes offer selectable motor starting capability with low reactance 2/3 pitch windings; low waveform distortion with non-linear loads, fault clearing short-circuits capability, and class F or H insulation.

Cooling system - Optional remote mounted cooling system, designed and tested for rated ambient temperatures, offers maximum flexibility for facility design requirements.

Control system - Standard PowerCommand[®] electronic control provides total system integration including remote start/stop, precise frequency and voltage regulation, alarm and status message display, AmpSentry protection, output metering, auto-shutdown.

Warranty and service - Backed by a comprehensive warranty and worldwide distributor network.

ISO8528-5- refer to factory for site and configuration specific transient performance classification

| Model | Standby rating | Prime rating | Continuous rating | Emissions compliance | Controller | Data sheets |
|------------------|-------------------|-------------------|-------------------|---|------------|--------------------------|
| | 50 Hz kVA (kW) | 50 Hz kVA (kW) | 50 Hz kVA (kW) | | | |
| C2750 D5e | 2750 (2200) | 2500 (2000) | 2000 (1600) | EPA Tier 2 and * <2000 mg NOx Emitter | 3.3 | EMERD-5843 EMERD-5844 |
| C3000 D5e | 3000 (2400) | 2750 (2200) | 2100 (1680) | EPA Tier 2 and * <2000 mg NOx Emitter | 3.3 | EMERD-5845 EMERD-5846 |

* Engine designed to emit <2000 mg/Nm³ @ 5% O₂ (<750 mg/Nm³ NOx @ 15% O₂) NOx from 30% - 100% load at standard conditions of 25C, 100 kPa, 30% RH and <7% FAME diesel fuel.

Generator set specifications

| | |
|---|--|
| Performance Class | Genset models have been tested in accordance with ISO 8528-5. Consult factory for transient performance information. |
| Steady state voltage regulation, no load to full load | ± 0.25% |
| Steady state frequency variation | ± 0.25% |
| Frequency regulation | Isochronous |
| Electromagnetic Compatibility Performance | Emissions to EN 61000-6-2:2005 Immunity to EN 61000-6-4:2007+A1:2011 |

Engine specifications

| | |
|-----------------------------|--|
| Design | 4 cycle, V, turbo charged and low temperature after-cooled |
| Bore | 170 |
| Stroke | 190 |
| Displacement | 77.6 L (4735 in ³) |
| Cylinder block | Cast iron, 18 cylinder |
| Battery capacity | 2200 amps minimum at ambient temperature of -18°C to 0°C (0°F to 32°F) |
| Battery charging alternator | 55 amps |
| Starting voltage | 24-volt, negative ground |
| Fuel system | Direct injection: number 2 diesel fuel, fuel filter, automatic electric fuel shutoff |
| Fuel filter | Triple element, 10 micron filtration, spin on fuel filter with water separator |
| Air cleaner type | Dry replaceable element |
| Lube oil filter type(s) | Four spin-on, combination full flow and bypass filters |
| Cooling system | 104 °F (40 °C) ambient |

Alternator specifications

| | |
|---------------------------------------|--|
| Design | Brushless, 4 pole, drip proof, revolving field |
| Stator | 2/3 pitch |
| Rotor | 2 bearing, flexible coupling |
| Insulation system | Class H on low and medium voltage, Class F on high voltage |
| Standard temperature rise | 150 °C standby |
| Exciter type | PMG (Permanent magnet generator) |
| Phase rotation | A (U), B (V), C (W) |
| Alternator cooling | Direct drive centrifugal blower fan |
| AC waveform total harmonic distortion | No load < 1.5%. Non distorting balanced linear load < 3% |

Available voltages

50 Hz line-neutral/line-line

- 220/380
- 230/400
- 240/415
- 254/440
- 1905/3300
- 3810/6600
- 6350/11000

Note: Consult factory for other voltages.

Generator set options

Engine

- Water jacket heater 220/240 V
- Centiinel
- Eliminator
- Pre-lube system
- Engine starter 24VDC motor redundant

Alternator

- Alternator heater
- High humidity isolation
- Exciter voltage regulator (PMG)
- Temperature sensor – RTDs
- Temperature sensor – alternator bearing RTD
- Differential current transformers
- Exciter voltage regulator (PMG)
- 80 °C – 150 °C temperature rise

Generator set

- Vibration isolators
- Batteries
- Battery charger

Control panel

- PowerCommand 3.3
- Paralleling
- Multiple language support
- 240 V control anti-condensation

Exhaust system

- Industrial silencer
- Residential silencer
- In-line or side entry options
- Accessories

Warranty

- 10 years for major components
- 5 years for standby application
- 2 years for prime application

Cooling system

- Cooling System Environmental Finish (Matrix Core)
- 50 °C (122 °F) radiator
- Remote radiator
- Slip fit connection
- Flanged (ASA) connection

Note: Some options may not be available on all models - consult factory for availability.

PowerCommand 3.3[®] – control system



Control system

The PowerCommand[®] control system is an integrated microprocessor based generator set control system providing voltage regulation, engine protection, alternator protection, operator interface and isochronous governing.

AmpSentry – Includes integral AmpSentry protection, which provides a full range of alternator protection functions that are matched to the alternator provided.

Power management – Control function provides battery monitoring and testing features and smart starting control system.

Advanced control methodology – Three phase sensing, full wave rectified voltage regulation, with a PWM output for stable operation with all load types.

Communications interface – Control comes standard with PCCNet and Modbus interface.

Service - InPower™ PC-based service tool available for detailed diagnostics, setup, data logging and fault simulation.

Reliable design – The control system is designed for reliable operation in harsh environment.

Multi-language support

Operator panel features

Operator panel features – The operator panel, in addition to the alternator, displays the Utility/AC Bus data.

Operator/display functions

- 320 x 240 pixels graphic LED backlight LCD
- Auto, manual, start, stop, fault reset and lamp test/panel lamp switches
- Alpha-numeric display with pushbuttons
- LED lamps indicating genset running, remote start, not in auto, common shutdown, common warning, manual run mode, auto mode and stop

Paralleling control functions

- Digital frequency synchronization and voltage matching
- Isochronous kW and kVar load sharing controls
- Droop kW and kVar control
- Sync check
- Extended paralleling (Peak Shave/Base Load)
- Digital power transfer control (AMF) provides load transfer operation in open or closed transition or soft (ramping) transfer mode

Alternator data

- Line-to-neutral and line-to-line AC volts
- 3-phase AC current
- Frequency
- kW, kVar, power factor kVA (three phase and total)

Engine data

- DC voltage
- Engine speed
- Lube oil pressure and temperature
- Coolant temperature
- Comprehensive FAE data (where applicable)

Other data

- Genset model data
- Start attempts, starts, running hours, kW hours
- Load profile (operating hours at % load in 5% increments)
- Fault history
- Data logging and fault simulation (requires InPower)

Standard control functions

Digital governing

- Integrated digital electronic isochronous governor
- Temperature dynamic governing

Digital voltage regulation

- Integrated digital electronic voltage regulator
- 3-phase, 4-wire Line-to-Line sensing
- Configurable torque matching

AmpSentry AC protection

- AmpSentry protective relay
- Over current and short circuit shutdown
- Over current warning
- Single and three phase fault regulation
- Over and under voltage shutdown
- Over and under frequency shutdown
- Overload warning with alarm contact
- Reverse power and reverse Var shutdown
- Field overload

Engine protection

- Battery voltage monitoring, protection and testing
 - Over speed shutdown
 - Low oil pressure warning and shutdown
 - High coolant temperature warning and shutdown
 - Low coolant level warning or shutdown
 - Low coolant temperature warning
 - Fail to start (over crank) shutdown
 - Fail to crank shutdown
 - Cranking lockout
 - Sensor failure indication
 - Low fuel level warning or shutdown
 - Fuel-in-rupture-basin warning or shutdown
- Full authority electronic engine protection

Standard control functions (continued)

Control functions

- Time delay start and cool down
- Real time clock for fault and event time stamping
- Exerciser clock and time of day start/stop
- Data logging
- Cycle cranking
- Load shed
- Configurable inputs and outputs (4)
- Remote emergency stop

Options

Auxiliary output relays (2)

Ratings Definitions

Emergency standby power (ESP):

Applicable for supplying power continuously to varying electrical loads for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528 and ISO 3046-1, obtained and corrected in accordance with ISO 15550.

Limited-Time Running Power (LTP):


Applicable for supplying power to a constant electrical load for limited hours. Limited-Time Running Power (LTP) is in accordance with ISO 8528.

Prime Power (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046-1. Data shown above represents gross engine performance and capabilities as per ISO 3046-1, obtained and corrected in accordance with ISO 15550.

Base Load (Continuous) Power (COP):

Applicable for supplying power continuously to a constant load up to the full output rating for unlimited hours. No sustained overload capability is available for this rating. Consult authorized distributor for rating. (Equivalent to Continuous Power in accordance with ISO 8528 and ISO 3046-1, obtained and corrected in accordance with ISO 15550).

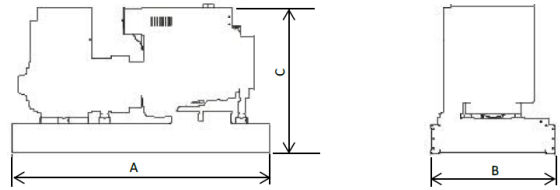

This outline drawing is to provide representative configuration details for Model series only. See respective model data sheet for specific model outline drawing number.

Do not use for installation design

Weight and dimensions

| Model | Dim "A" mm | Dim "B" mm | Dim "C" mm | Set weight* dry kg | Set weight* wet kg |
|------------------|---------------|---------------|---------------|-----------------------|-----------------------|
| C2750 D5e | 5670 | 2989 | 3197 | 17715 | 18311 |
| C3000D5e | 5670 | 2989 | 3197 | 17994 | 18590 |

*Note: Weights represent a set with standard features. See outline drawings for weights of other configurations.

Certifications

| | | | |
|---|---|--|---|
| ISO 9001 ISO 14001 ISO 45001 | This product was manufactured in a facility whose quality management system is certified to ISO 9001 and its Health Safety Environmental Management Systems certified to ISO 14001 and ISO 45001. |  | The CE marking is only valid when equipment is used in a fixed installation application. Material compliance declaration is available upon request. |
| | |  | The UKCA marking is only valid when equipment is used in a fixed installation application. Material compliance declaration is available upon request. |
| | | ISO 8528 | This generator set has been designed to comply with ISO 8528 standards. |

* Approximate Weight

** Total tank capacity including dead stock

Authorised Representative



Get in Touch with Us

Plot N0-1, Sector-34, E.H.T.P,
 Gurugram-122001, Haryana
 Info@sudhirpower.com
 +91-124-4168000



<https://www.facebook.com/sudhirpowerofficial/>



<https://www.linkedin.com/company/sudhir-power-limited/>



https://www.instagram.com/sudhir_power/



https://x.com/sudhir_powers



<https://www.youtube.com/@sudhirpowerlimitedofficial>

